




4 pt. 24VDC Out (Source), 4 pt. 110AC Out Module

EZIO-4DCOP4ACO

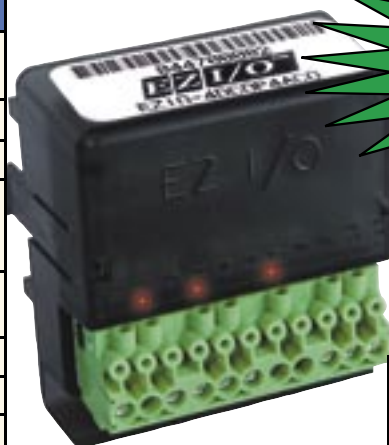

EZIO-4DCOP4ACO

**Terminal Block
300 Volt/10 Amp/
14AWG UL Rating**

| Module Specifications | | |
|----------------------------|---------------------------------------|--|
| AC/DC Power Supply Specs | Voltage Range | |
| | Number of Outputs | 4 (sourcing) |
| DC Output Specs | Peak Voltage | 50.0 VDC |
| | Maximum Steady State Output Current | 0.5A per output, 1.0A max per module @ 50°C |
| | Maximum Leakage Current | 100µA @ 50 VDC @ 50°C |
| | ON Voltage Drop | 2 VDC @ 0.5A |
| | Maximum Inrush Current | 0.8A for 10ms |
| | OFF to ON Response | < 2µs |
| | ON to OFF Response | <10µs |
| | Status Indicators | Red LED for each output |
| | +V Terminals & Commons | One V+, 1 Common |
| | Short Circuit Protection | 1 Amp per module, turns off outputs upon short circuit detection |
| | Base Power Required (3.3V) | 20mA, for all 4 on |
| | Optical Isolation | 2500 Volt |
| | Wires | 1 of 14 AWG, 2 of 18 AWG, 4 of 22 AWG |
| | AC Output Specs | Number of Output Points |
| Number of Commons | | 1 |
| Output Voltage Range | | 20-132 VAC |
| Peak Voltage | | 180 Volt |
| ON Voltage Drop | | 1.2 V @ 1A |
| Maximum Current | | 1.2 A @ 25°C, 0.8A @ 50°C for each output |
| Maximum Leakage Current | | 1mA @ 132 VAC |
| Maximum Inrush Current | | 38Amps for 16.6ms |
| Minimum Load | | 15mA |
| OFF to ON Response | | max 1/2 cycle |
| ON to OFF Response | | max 1/2 cycle |
| Fuse | | No fuse |
| Base Power Required (3.3V) | | 35mA for all 4 on |
| Optical Isolation | | 2500 Volt |
| Wires | 1 of 14 AWG, 2 of 18 AWG, 4 of 22 AWG | |

| Pinout Information | |
|--------------------|------------------------|
| Pin No. | EZIO-4DCOP4ACO |
| 1 | AC Output(1) |
| 2 | AC Output(2) |
| 3 | AC Output(3) |
| 4 | AC Output(4) |
| 5 | AC_Common |
| 6 | DC Output(5) |
| 7 | DC Output(6) |
| 8 | DC Output(7) |
| 9 | DC Output(8) |
| 10 | GND |
| 11 | Customer_Supply(+VS) |

